


GS-VK

GS-VK 200 - 1900

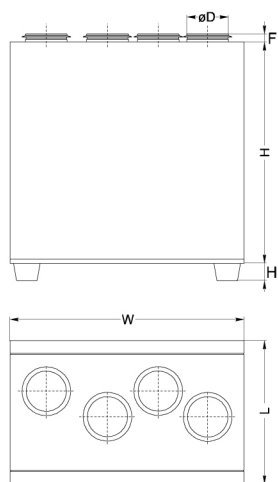

Type	Dimensions [mm]					
	L	W	H	øD	H ₁	F
GS-VK 200	410	595	716	125	-	30
GS-VK 400	596	635	800	160	-	30
GS-VK 700	670	1000	980	250	126	30
GS-VK 1200	760	1350	1200	315	126	40
GS-VK 1900	800	2000	1600	400	140	70

Type	Accessories													
	UNI PRO TPC	1141 RC02-F2 KFF-U	AKS	AVS	AVA	AP SKG	PS	SP	SSB Heating	SSB Cooling	RMG 80/60°C	RMG 60/40°C	VVP/VXP 80/60°C	VVP/VXP 60/40°C
GS-VK-200-E	+	+	125	-	125	125	600	*	-	-	-	-	-	-
GS-VK-200-W	+	+	125	125	125	125	600	**	61	81	3-0,63-4	3-0,63-4	45.10-0,63	45.10-0,63
GS-VK-400-E	+	+	160	-	160	160	600	*	-	-	-	-	-	-
GS-VK-400-W	+	+	160	160	160	160	600	**	61	81	3-0,63-4	3-0,63-4	45.10-0,63	45.10-0,63
GS-VK-700-E	+	+	250	-	250	250	int	*	-	-	-	-	-	-
GS-VK-700-W	+	+	250	250	250	250	int	**	61	81	3-1,0-4	3-0,63-4	45.10-1,0	45.10-0,63
GS-VK-1200-E	+	+	315	-	315	315	int	*	-	-	-	-	-	-
GS-VK-1200-W	+	+	315	int	315	315	int	**	61	81	3-0,63-4	3-0,63-4	45.10-0,63	45.10-0,63
GS-VK-1900-E	+	+	400	-	400	400	int	*	-	-	-	-	-	-
GS-VK-1900-W	+	+	400	400	400	400	int	**	61	-	-	-	-	-

* - 227S - 230 - 05

** - 341-230-05